

CLASSIC PEDESTAL



The **CLASSIC** PEDESTAL Range

A Range of Versatile Galvanised Steel Pedestals With Composite or Metal Outer Skins

PRODUCT FEATURES

- Hot-dipped galvanised steel internal chassis
- UV stabilised external shell and shell material variants: steel, composite or aluminium
- 360 degree low energy LED lighting
- Fully segregated electric, water and lighting compartments
- Height and width variants (Standard, Midi and Maxi)
- Socket variants: 16amp single phase to 250amp three phase
- Water tap variants: 1/2" to 1"
- Able to accommodate all switching and monitoring management solutions
- Designed for ease of installation and maintenance
- The range also consists of SOS, sanitation, emergency telephone and pier ID pedestals



Internal Electric, Water & Lighting Segregation




UV Stabilised



CE Certified



IP65 Weather Proof



LED Illumination




Strong & Durable

SPECIFICATIONS

CHARACTERISTICS

Materials	Head: ABS Granulate Natural Polyethylene Body Internal: Hot-Dipped Galvanised Steel Body External: UV Stabilised Foamex / Powder Coated Aluminium / Aluminium Composite / 304 Stainless Steel BS EN-10204:2004, BS EN 573-3:2013, BS EN 755-2:2016
Materials	Standard: A: 250mm, 500mm, 750mm, 850mm, 1000mm B: 415mm, 665mm, 915mm, 1015mm, 1165mm C: 205mm D: 185mm E: 165mm Midi: A: 750mm, 850mm, 1000mm B: 915mm, 1015mm, 1165mm C: 270mm D: 240mm E: 165mm Maxi: A: 750mm, 850mm, 1000mm B: 915mm, 1015mm, 1165mm C: 325mm D: 295mm E: 165mm
Operating Temperature	-30°C to +60°C (Installed and Operated Within Multiple Climates from Around the Globe)
IP Rating	Pedestal Rated IP65, Sockets IP44/IP67 As Per Requirements
Compliances	BS7671 Wiring Regulations BS EN 61439-2:2011, BS EN 61439-5:2015 CE Certified Low Voltage Directive 2014/35/EU Electromagnetic Directive 2014/30/EU Corrosion Resistant / Salt Mist Tested Panels ISO 9227 UV Stabilised Flame Retardant to UL94
CE	
Typical Weight (AVG)	12KG - 15KG (Standard 750mm)

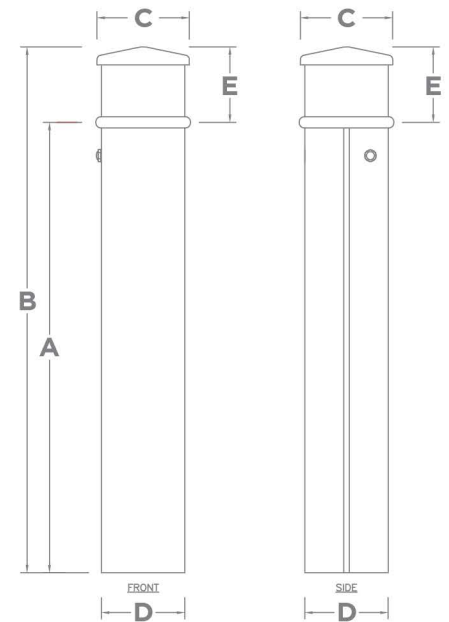

ELECTRICAL

Sockets	16amp Single Phase to 250amp Three Phase EN60309-2 / EN60309-1
Voltage	230V to 415V
Overload & Fault Current Protection	MCB/RCD or RCBO IEC 60898-1, IEC 60947-1, IEC 61009-1
Input Voltage	230V / 415V

WATER

Taps	1/2" to 1"
Pressure	3 Bar Limit Controlled, 10 Bar Limit Non-Controlled
Protection	Lagging; 1/2" : 22x9mm, 3/4" : 28x13mm, 1" : 35x13mm
Input	MDPE Coupler
Grade	Brass (UK), Stainless Steel (International)

LIGHTING

Type	360 Degree Low Energy LED
Rating	Rating 4300k 4x1 Watt
Protection	MCB

OPTIONS

- Shell colours and materials
- Branding vinyls
- Electric and water metering
- Switching and control
- TV, telephone and data outlets
- Heat trace tape
- LED Colours

Images are for marketing purposes only and are not contractual © 2017



Head office contact:
t: +44 (0) 1205 724754
f: +44 (0) 1205 724876
rolec@rolecserv.co.uk

Rolec Services Ltd
Ralphs Lane, Frampton West
Boston, Lincolnshire
UK. PE20 1QU

MSDS-0002

@RolecMarina
www.rolecserv.com